

BILL TO:		Date:	SHIP VIA:	Page	of
		Account #:	<input type="checkbox"/> Will Call	Job #:	
		P.O. #:	<input type="checkbox"/> Delivery Service		
SHIP TO:		Ordered by:	<input type="checkbox"/> Ship		
		Sidemark:			
		Phone #:	Fax #:		

HunterDouglas

EXPRESS™ NEWSTYLE®

Hybrid Shutters

Opening #	Room	Qty.	Color ①	Hinge Color ②	Louver Size ③	IM or OM ④	Frame Type ⑤	Ordered Size ⑦		# of Panels Per Opening ⑧	Panel Configuration ⑨	Frame Detail ⑩	Buildout ⑪	Tilt Bar ⑫	Track Valance Type ⑬	Divider Rail Height (Double-Hung and Café) ⑭			T-Post ⑮			Magnets ⑯
								Width	Height							DR2	DR1	1st	2nd	3rd		
																DR2		1st	2nd	3rd		
																DR1						
																DR2		1st	2nd	3rd		
																DR1						
																DR2		1st	2nd	3rd		
																DR1						
																DR2		1st	2nd	3rd		
																DR1						

NOTES: IM (Inside Mount) = Factory takes deductions. OM (Outside Mount) = Finished shutter size. See order form key or Reference Guide for more details.

Everything below this dashed line is actual window opening dimensions and information. Above this dashed line is the order specification. Fabricators are only responsible for the information provided above this dashed line.

OPENING # _____ CLEARANCE DEPTH _____ TRIM TO TRIM

SILL DETAIL WINDOW DIAGONAL

A. Width _____ B. Height _____ C. Projection _____ D. _____ E. _____

← W


← W

← W H H H

↓ ↓ ↓

NOTES: ⑥ Rough Measure _____ X _____
Number of Panels _____

SILL DETAIL AND WINDOW DIAGONAL MEASUREMENTS ARE DESCRIBED BELOW.

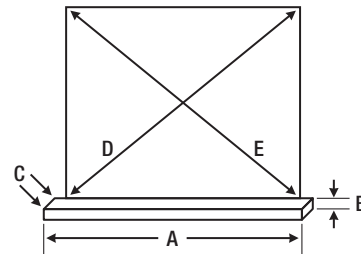

MEASURED BY (installer signature required)

INSTALLER CERTIFICATION NUMBER

CUSTOMER SIGNATURE (for verification)

DEALER SIGNATURE

DATE

OPENING # _____ CLEARANCE DEPTH _____ TRIM TO TRIM

SILL DETAIL WINDOW DIAGONAL

A. Width _____ B. Height _____ C. Projection _____ D. _____ E. _____

← W

← W

← W H H H

↓ ↓ ↓

NOTES: ⑥ Rough Measure _____ X _____
Number of Panels _____

OPENING # _____ CLEARANCE DEPTH _____ TRIM TO TRIM

SILL DETAIL WINDOW DIAGONAL

A. Width _____ B. Height _____ C. Projection _____ D. _____ E. _____

← W

← W

← W H H H

↓ ↓ ↓

NOTES: ⑥ Rough Measure _____ X _____
Number of Panels _____

Express™ NewStyle® Order Form Key

Use the following key as a guide when completing the order form for Express™ NewStyle® hybrid shutters.

1 Color

Specify color number and name.

650 = Pure White 651 = Soft White 652 = Warm Cream

2 Hinge Color

Specify hinge color number and name.

009 = White (standard with 650 Pure White)

010 = Off-White (standard with 651 Soft White & 652 Warm Cream)

3 Louver Size

Specify louver size: 2 1/2" or 3 1/2".

4 IM or OM

Specify inside mount or outside mount.

IM = Inside Mount

Factory takes a standard framed deduction of 1/4" from width and height or a standard without frame deduction of 3/16" from width and height.

On all inside mounts, diagonal measurements must be taken. If diagonal measurements are not equal, consider making greater deductions than the standard 1/4" (framed) or 3/16" (without frame). If the diagonal measurement difference is greater than 1/2", we recommend an outside mount for that particular window opening.

OM = Outside Mount

Factory takes no deductions. Submitted size will be the finished shutter size.

When measuring the opening of a typical window for outside mounts, we recommend adding the width of the base of the frame plus 1/4", per framed side, to the largest width and height measurements. This provides a 1/4" reveal around the entire window opening.

Standard additions:

Frame Type	3-Sided Frame		4-Sided Frame	
	Width	Height	Width	Height
L10	2 3/4"	1 3/8"	2 3/4"	2 3/4"

5 Frame Type (I) = Inside Mount, (O) = Outside Mount

Z10 = Trim Z-frame (I)

L10 = Trim L-frame (I or O)

HSS = Hang strip side-by-side

HSB = Hang strip behind

WF = Without frame (panels only)

Note: All HS frames are based on two hang strips, left and right. On inside mounts, two light stops top and bottom are included.

6 Rough Measure

Enter rough measurements and number of panels. This will be used as a guide for price estimates and configurations until a final measure is performed by a trained installer.

7 Ordered Size

Enter width and height dimensions to the nearest 1/16".

8 Number of Panels Per Opening

1 = One panel 2 = Two panels 4 = Four panels

9 Panel Configuration

Print the letters of the panel configuration. See the following examples:


One Panel Left



One Panel Right



Two Panels



Four Panels with One T-Post



Then, in the appropriately numbered box, draw the panel configuration. Include the letters of the configuration.

10 Frame Detail

2 = 2-sided; 3 = 3-sided (top, left, right); 4 = 4-sided

4SIL = 3-sided L-frame or Z-frame with bottom sill frame†

3D = 3-sided door which provides 5/8" floor clearance

† When using L-frame instead of bottom sill frame indicate with "-L".

11 Build-Out

1 = Single build-out projection

L10

1 3/8"

12 Tilt Bar

F = Traditional front center tilt bar with upward closure

13 Valance Type (Track Systems Only)

Not available with Express NewStyle program.

14 Divider Rail/Double-Hung/Café Height

DR1 = First divider rail (required for panel heights over 60")

DR2 = Second divider rail (required for panel heights over 90")

Note: Enter "C" if the desired location is at the center of the panel.

For OM (outside mount): Enter measurement(s) from bottom of frame to center of divider rail(s).

For IM (inside mount): Enter measurement(s) from inside bottom of window to center of divider rail(s).

15 T-Post

EQ = Only equally spaced T-posts available

16 Magnets

All 4-sided frames come standard with pre-installed magnets.

Y = Yes, pre-install N = No, do not pre-install

Lineal Materials

Grid prices include standard frames, T-posts and hardware.

To order additional lineal materials, indicate quantity, color and length.

HS10 = Hang strip

LS = Light stop